



► FEATURES

- + Ships with MERV 11 filter
- + Can be upgraded to MERV 13 filter with simple filter change
- + Minimal maintenance required — filter lasts up to one year
- + Made of corrosion-resistant heavy gauge galvanized steel
- + Proprietary door design and Self-Seal™ media virtually eliminates air bypass, delivering MERV performance as rated
- + UL listed air purifier
- + UL classified filters
- + Load rated up to 400 lbs.
- + 5-year warranty on cabinet from date of installation

► BENEFITS

- + Offers equipment protection from dust buildup
- + Assured equipment performance
- + Superior performance over one-inch panel filters and four-inch cartridge filters

PRODUCT SPECIFICATIONS

	Nominal Size (In Inches)	Shipping Weight	MERV 11				MERV 13			
			Replacement Filter	Resistance @ Airflow Volume (in. w.c. @ CFM)	Shipping Weight (full carton)	Filtering Area	Replacement Filter	Resistance @ Airflow Volume (in. w.c. @ CFM)	Shipping Weight (full carton)	Filtering Area
Model 1910	25 x 20	18 lbs.	Ships With Model 910	.03"@400 .12"@1200 .05"@600 .15"@1400 .07"@800 .18"@1600 .09"@1000 .22"@1800 .27"@2000	28 lbs.	25.9 sq. ft.	Also Uses Model 913	.04"@400 .17"@1200 .07"@600 .22"@1400 .10"@800 .25"@1600 .13"@1000 .30"@1800 .35"@2000	28 lbs.	25.9 sq. ft.




REMOVAL EFFICIENCY (Based on Particle Size)

	0.3-1.0 Microns	1.0-3.0 Microns	3.0-10 Microns
MERV 11	37%	67%	92%
MERV 13	63%	88%	93%

Inlet Side Return Duct Connection

Front

Outlet Side Furnace Connection

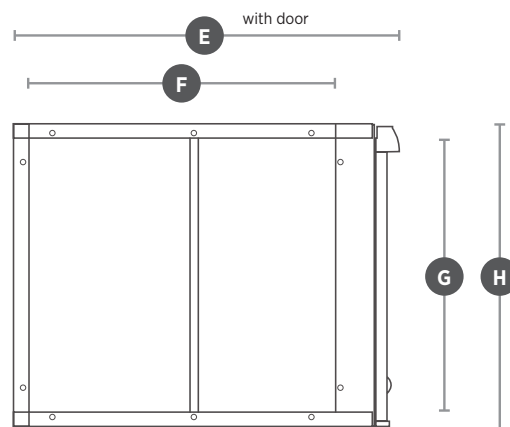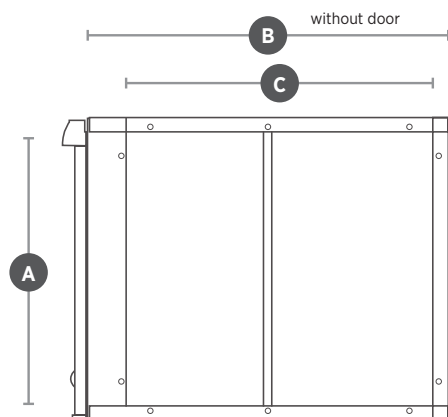

Dim.	Description	Model 1910
A	Inlet Opening Height	22¾" (578mm)
B	Outer Housing Depth without Door	20⅙" (510mm)
C	Inlet Opening Width	15⅞" (403mm)
D	Unit Width	6¾" (171mm)
E	Outer Housing Depth with Door & Clips	22⅙" (560mm)
F	Outlet Opening Width	15⅞" (403mm)
G	Outlet Opening Height	22¾" (578mm)
H	Unit Height at Back	25⅙" (637mm)

REPLACEMENT FILTERS		
Model 1910	Aprilaire Part No. 910 Aprilaire Part No. 913	MERV 11 MERV 13